

LPS-532-Q/200~500mJ

SPECIFICATIONS




**HIGH ENERGY LAMP
PUMPED SOLID STATE
Q-SWITCHED LASER**

High energy lamp pumped solid state Q-switched laser at 532nm has the features of high single pulse energy , short pulse duration , and high peak power , which is widely used in PIV, LIF, LIBS, ICP-MS, Raman, scientific research, and so on.



| | | | | |
|------------------------------------|--------------------------------|-----|-----|-----|
| Wavelength (nm) | 532±1 | | | |
| Operating mode | Q-switched: EO (Electro-optic) | | | |
| Single pulse energy (mJ) | 200 | 250 | 350 | 500 |
| Pulse duration (ns) | <10 | | | |
| Rep. rate (Hz) | 1~10 (adjustable) | | | |
| Energy stability | <3% , <2% | | | |
| Beam divergence, full angle (mrad) | <3 | | | |
| Beam diameter (mm) | ~9 | | | |
| Warm-up time (minutes) | <15 | | | |
| Beam height from base plate (mm) | 80 | | | |
| Cooled method | Water Cooled | | | |
| Operating temperature (°C) | 15~35 | | | |
| Power supply (220/110VAC) | PSU-LPS-L(3U) | | | |
| Expected lifetime (pulses) | 10 ⁸ | | | |
| Warranty period | 1 year | | | |

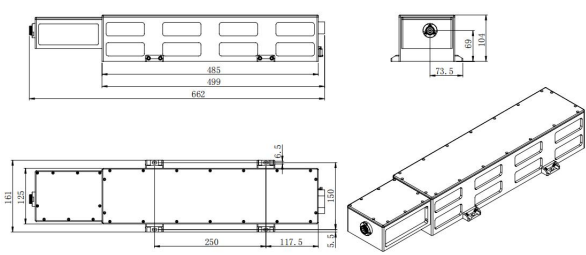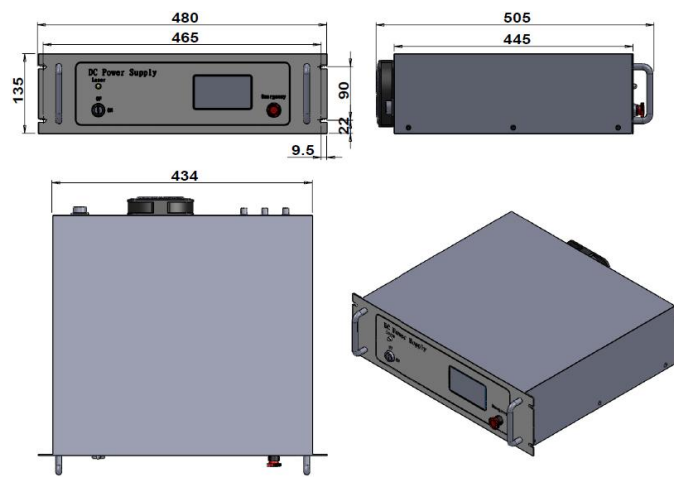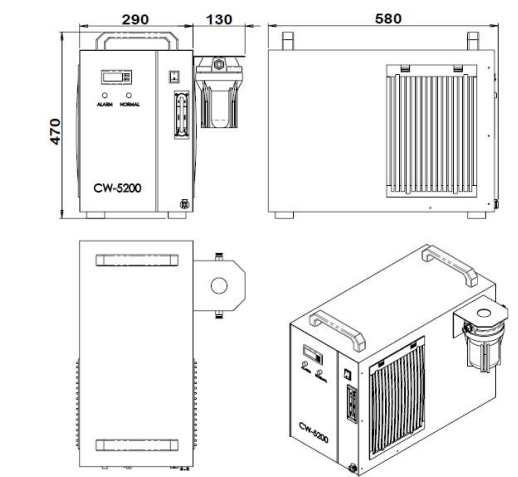

| LPS-532-Q | PSU-LPS-Q (3U) | Water Chiller (WCH-1500) |
|---|--|--|
|  <p>662(L) × 161(W) × 104(H) mm³, 12kg</p> |  <p>480 (L) × 505(W) × 135(H) mm³, 16 kg Rep. Rate and Voltage can be adjusted by touch screen</p> |  <p>580(L) × 290(W) × 470(H) mm³, 24 kg</p> |