

MDL-III-405/1~1000mW




VIOLET DIODE LASER  
AT 405nm

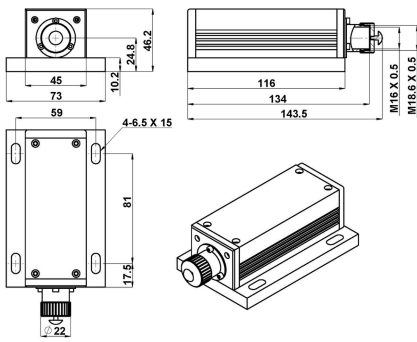
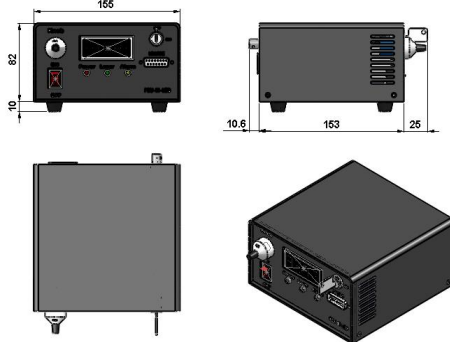
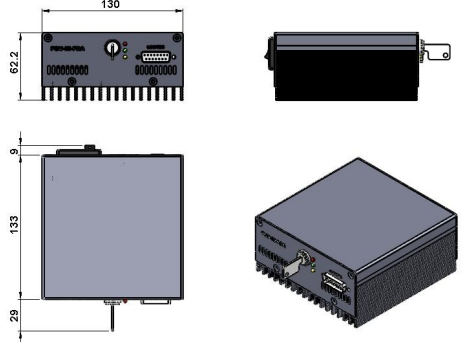
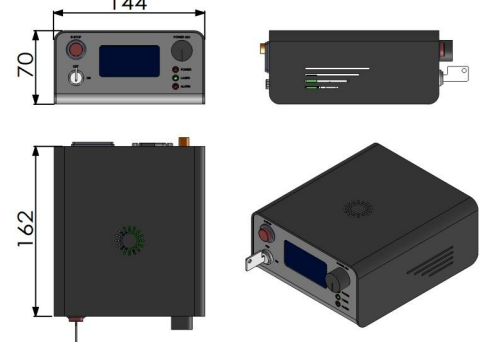
It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Central wavelength (nm)	405±5	405±6
Operating mode	CW	
Output power (mW)	>1, 50, 100, ...,500	>500, 600, 700, ...,1000
Power stability (rms, over 4 hours)	<3%, <2%, <1%, <0.5%	
Transverse mode	Near TEM <sub>00</sub>	Multimode
M <sup>2</sup> factor	<1.5 (<1.2, optional)	/
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	~2.5 (~1.2, optional)	~3.0×2.5
Beam divergence, full angle (mrad)	~0.5	<2.5×1.0
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)	>50:1 Horizontal±5 degree (Vertical Optional)
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	24.8	
Operating temperature (°C)	10~35	
Power supply	85-264VAC	PSU-III-LED/ PSU-III-FDA (Frequency for 1Hz-30kHz)
	100-240VAC	PSU-A-D (Frequency for 30kHz -100kHz)
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz, 30kHz-100kHz; and Analog modulation optional	
Expected lifetime (hours)	10000	
Warranty	1 year	



MDL-III-405	PSU-III-LED	PSU-III-FDA	PSU-A-D
 <p>143.5(L)×73(W)×46.2(H) mm<sup>3</sup>, 0.7kg</p>	 <p>188.6 (L) ×155(W) ×92 (H) mm<sup>3</sup>, 1.5kg</p>	 <p>171(L) ×130(W) ×62.2 (H) mm<sup>3</sup>, 1.2kg</p>	 <p>162(L) ×144(W) ×70 (H) mm<sup>3</sup>, 1.0kg</p>