

PS-D-355/1W~30W



PICOSECOND PULSED LASER AT 355nm




Picosecond pulsed laser at 355nm is made features of short pulse duration, high repetition rate and good beam quality, which is used in glass marking, sapphire marking, ceramic cutting, semiconductor cutting, solar panels coating, film scribing, etc.



SPECIFICATION

Wavelength (nm)	355±1		
Output power (W)	1~30W@1MHz	1W~8W	1W~5W
Rep.rate (MHz)	400KHz~2MHz	80MHz±1	120MHz±1
Pulse duration (ps)	<10		
Power stability (rms, over 4 hours)	<3%, <1%		
Peak-to-Peak stability (rms ,over 4 hours)	<2 %		
Transverse mode	TEM ₀₀		
Beam Circularity (%)	>90		
Beam quality (M ²)	<1.2		
Beam divergence, full angle (mrad)	<1		
Beam diameter at the at the aperture (1/e ² , mm)	~4	~2	~2
Polarization ratio	>100:1, Horizontal		
Beam height from base plate (mm)	106		
Warm-up time (minutes)	<20		
Operating temperature (°C)	20~30		
Power supply	DC 36V/ 40A (optional)		
Water Chiller	Water Chiller (5U-1)		

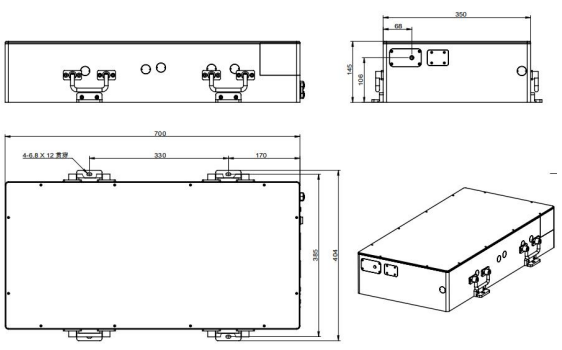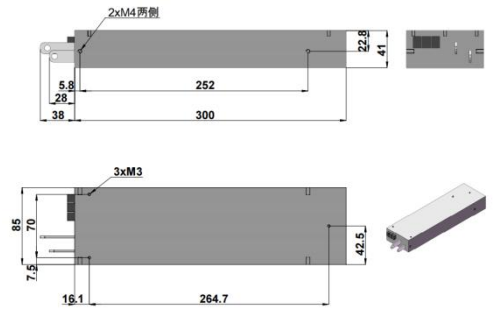

<p>PS-D-355 <i>Integrated electronics</i></p>	<p>Power supply 100-240VAC</p>	<p>Water Chiller (5U-1) Ambient Temperature ≤ 27°C</p>
 <p>700 (L) × 404 (W) × 145 (H) mm³, 55 kg</p>	 <p>DC36V 40A; 300 (L) × 85 (W) × 41 (H) mm³, 1.8 kg</p>	 <p>627 (L) × 426 (W) × 237 (H) mm³, 28 kg</p>