

TEM-F-1060/1~500mW (TEM₀₀)




**INFRARED DIODE LASER
AT 1060nm**

It features TEM₀₀ mode, ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in measurement, communication, spectrum analysis, etc

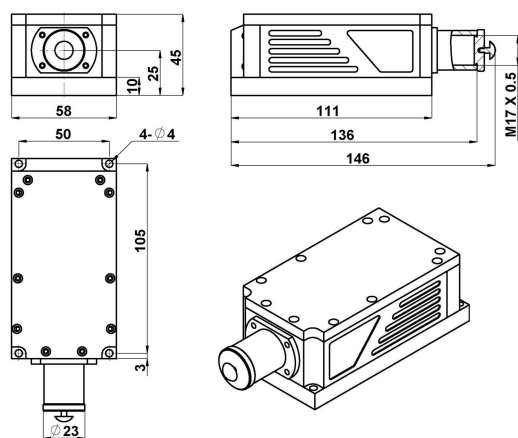
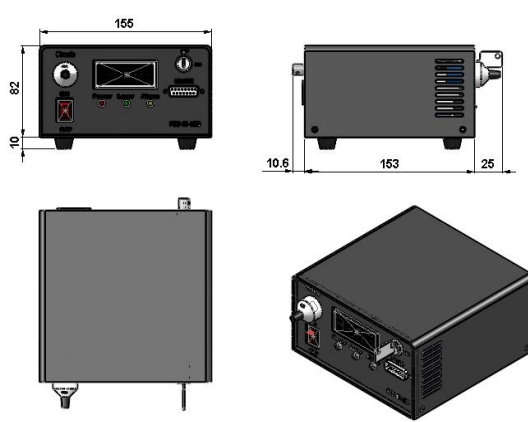
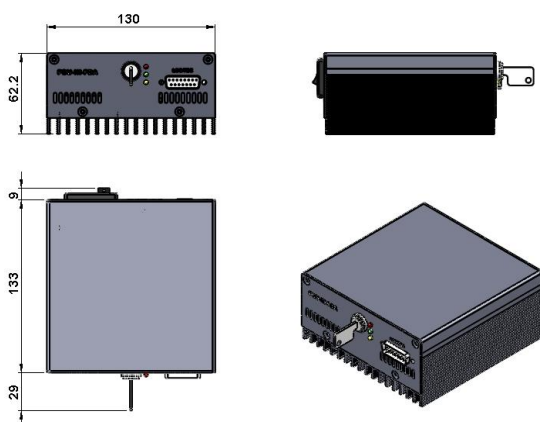


SPECIFICATIONS

Central wavelength (nm)	1060±10	1060±5	1060±5
Operating mode	CW		
Output power (mW)	>1, 2, 3, ...,10	>10, 20, ...,50	>50, 100, ...,500
Power stability (rms, over 4 hours) 25℃	<3%, <2%, <1%, <0.5%		
Transverse mode	TEM ₀₀		
Ellipticity	>0.95		
M ² factor	<1.1		
Beam diameter at the aperture (1/e ² ,mm)	~1.0		
Beam divergence, full angle (mrad)	<1.5		
Warm-up time (minutes)	<5		
Beam height from base plate (mm)	25		
Operating temperature (℃)	25+/-3		
Power supply (85-264VAC)	PSU-III-LED	PSU-III-FDA	
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional		
Expected lifetime (hours)	10000		
Warranty	1 year		



Note: The laser head needs to be used on a heat sink with good heat dissipation.

TEM-F-1060	PSU-III-LED	PSU-III-FDA
 <p>146 (L) × 58(W) × 45 (H) mm³, 0.7kg</p>	 <p>188.6 (L) × 155(W) × 92 (H) mm³, 1.5kg</p>	 <p>171(L) × 130(W) × 62.2 (H) mm³, 1.2kg</p>