




FC-W-638/ 525C 2.9W

## HIGH POWER FIBER COUPLING DIODE LASER SYSTEM AT 638/ 525nm


The FC-W-638/ 525 series (Fiber Coupling Laser System) have integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in ONE box. Its compact dimension and convenient functions, such as power adjustment, temperature control, LED display etc, make it very suitable for scientific research, industrial and medical applications.

### SPECIFICATIONS

Wavelength (nm)	638±10	525±10
Output power (W) @ after 200um fiber	1.6	1.3
Operating mode	CW	
Cooled method	Air cooled	
Fiber Core Diameter (um)	200, 400	
Fiber Connector	SMA905/ FC	
Numerical Aperture (NA)	0.22	
Power stability (rms, over 4 hours)	<1%	
Warm-up time (minutes)	<5	
Operating temperature (°C)	25+/- 3	
Power supply	100-240VAC	
Modulation option	TTL/ Analog 1Hz-1KHz, 1KHz-10KHz, 10KHz-30KHz	
Expected lifetime (hours)	10000	

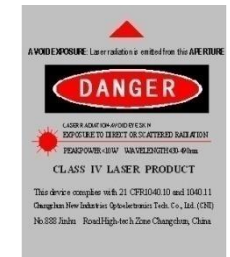

### Laser

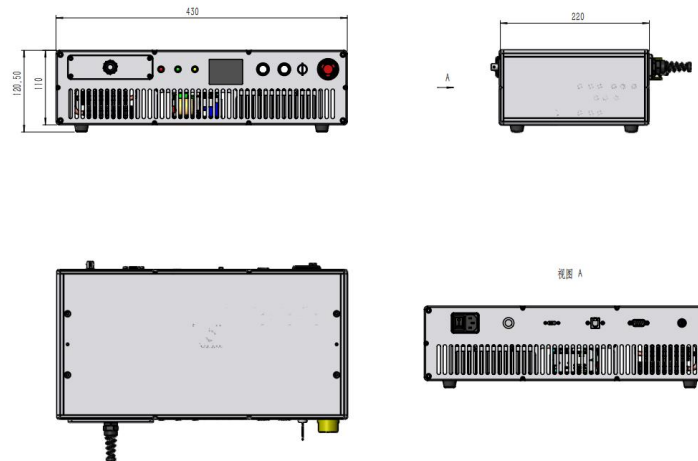

430 (L)×220 (W)×120.5 (H)mm<sup>3</sup>