




FC-W-638/ 980/ 1550C 12W

**HIGH POWER FIBER COUPLING  
DIODE LASER SYSTEM AT 638/ 980/  
1550nm**


The FC-W-638/ 980/ 1550 series (Fiber Coupling Laser System) have integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in ONE box. Its compact dimension and convenient functions, such as power adjustment, temperature control, LED display etc, make it very suitable for scientific research, industrial and medical

**SPECIFICATIONS**

Wavelength (nm)	638±10	980±10	1550±10
Output power (W) @ after 200um fiber	0.4	10	2.5
Operating mode	CW		
Cooled method	Air cooled		
Fiber Core Diameter (um)	200, 400		
Fiber Connector	SMA905/ FC		
Numerical Aperture (NA)	0.22		
Power stability (rms, over 4 hours)	<1%		
Warm-up time (minutes)	<5		
Operating temperature (°C)	25+/- 3		
Power supply	100-240VAC		
Modulation option	TTL/ Analog 1Hz-1KHz, 1KHz-10KHz, 10KHz-30KHz		
Expected lifetime (hours)	10000		

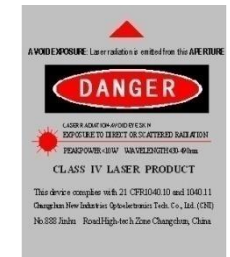

**Laser**

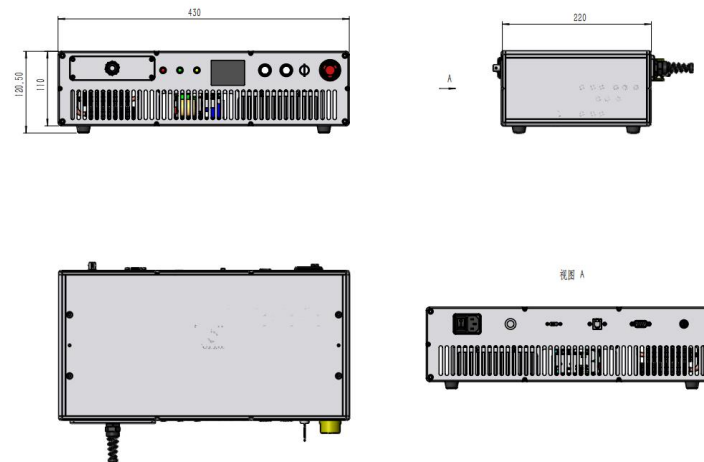

430 (L)×220 (W)×120.5 (H)mm<sup>3</sup>