

■ **Features**

- 880nm
- With 9um Fiber
- Coaxial or B1 Package
- Built-in PD




■ **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Reverse Voltage	Vr	2.0	V
Operating Temperature	Top	-10 ~ +60	°C
Storage Temperature	Tstg	-20 ~ +85	°C
Lead Soldering Temperature (10sec)	Tis	250	°C


■ **Initial Electrical/Optical Characteristics**

Item	Symbol
Center Wavelength @ 25°C	880±10nm
Output Power	2mW
Fiber Type	SMF-28
Fiber Core	9um
Monitor Current	0.5mA
PD Reverse Voltage	30V
Recommend Operating Temperature	25°C
Fiber Connector	FC/SC/SMA905
Fiber Length	80cm
Threshold Current (Typ.)	10mA
Operating Current (Typ.)	30mA
Operating Voltage	2.2V
Package Style	Coaxial or B1
Photodiodes	Built-in


Coaxial Package View

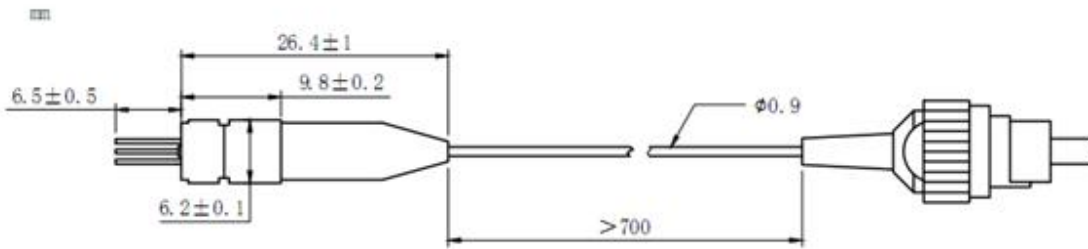

B1 Package View

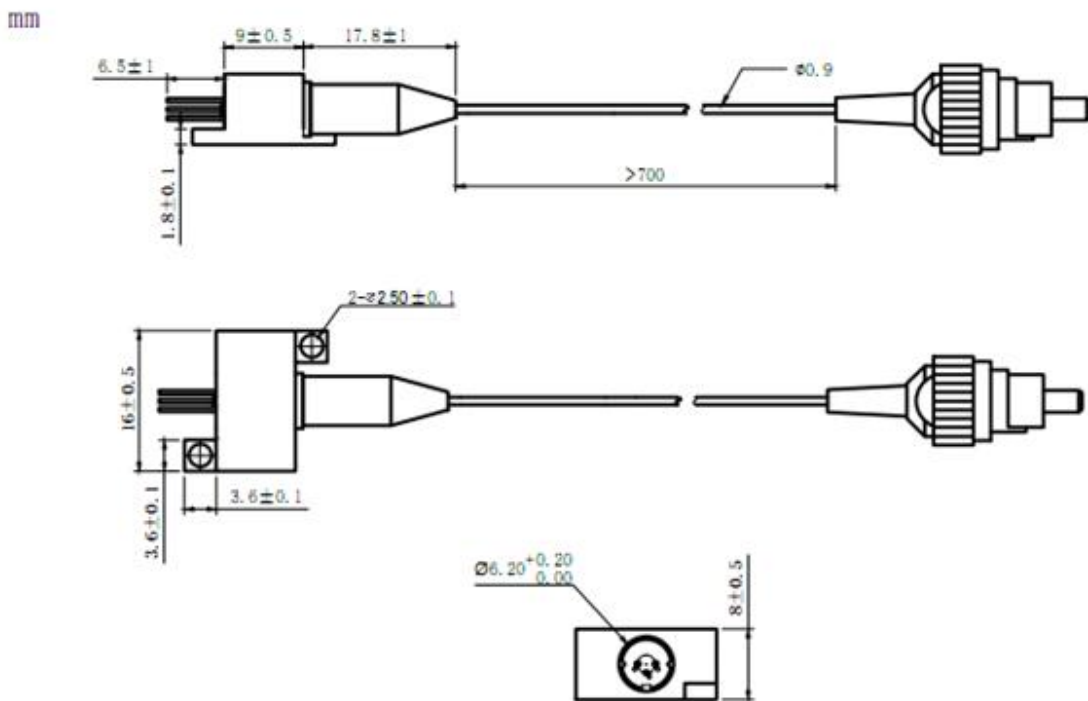

PIN Bottom View



1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Changchun New Industries Optoelectronics Tech. Co., Ltd
<http://www.cnilaser.com>

◆ CONTACT

No.888, Jinhu Road, High-tech Zone, Changchun
 130103, China

Phone: +86-431-87033597

Fax: +86-431-87033597