




Features:

- ◆ Multi-channel independent control output
- ◆ High brightness, high efficiency
- ◆ Precise adjustment of brightness
- ◆ Support TTL control output
- ◆ Customizable

Model	SLE-VI
Channel	6
Wavelength range	360-750nm
LED Peaks	365nm/440nm/470nm/555nm/630nm/730nm
Output Power	400~1400mW@365nm/440nm/470nm/555nm 500~1000mW@630nm ≥50mW@730nm (Output power per source channel is dependent on filter bandpass and light guide diameter)
Control Mode	Four independent controls, 0~100% dimming, accuracy of 1%
ON/OFF Response Times	Rising/ Descending Edge (10%~90%) < 50us
Operating Mode	Continuous Output, Default TTL Modulation (Analog Modulation Optional)
Control Mode	Support RS232 host computer control
Control Options	SMA - External trigger TTL signal (external trigger analog modulation optional) Serial Interface (RS232) - Light Output ON/OFF and brightness adjusting Manual control box (optional) - Light Output ON/OFF and brightness adjusting
Optical Transmission	3mm diameter liquid optical waveguide (LLG)
Operating Temperature	10~35°C
Power Input	100-240VAC 50/60HZ
Cooled Method	Air Cooled
Size	264mm×129mm×199mm (Reference)
Warranty	2 Years

Spectrogram:

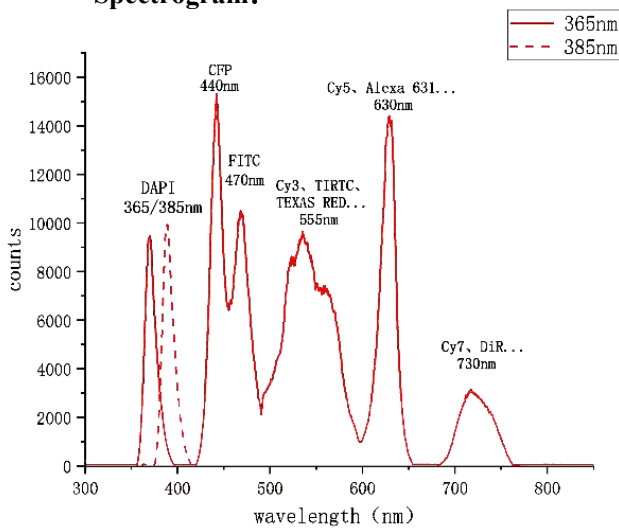

Dimensions:

