

FS-H-532A/1-100mW


FEMTOSECOND PULSED LASER AT 532nm

All Fiber Femtosecond pulsed laser at 532nm is made features of short pulse duration, high repetition rate, high stability and good beam quality, which is used in optical microscope, photon imaging, physics experiment, etc.



SPECIFICATIONS

Wavelength (nm)	532±2
Operating mode	Pulsed
Average power (mW) ¹	1-100
Single pulse energy (nJ)	1-1.25
Rep. rate (MHz)	80±1
Pulse duration (fs)	<150
Peak power (kW)	1-7.5
Ave power stability (rms, 4 hours±3°C)	<2%, <1%
Warm-up time (minutes)	<10
Transverse mode	TEM ₀₀
Beam divergence, full angle (mrad)	<1.0
Beam diameter at the aperture (1/e ² ,mm)	~1.0
M ²	<1.2
Polarization ratio	>100:1 Horizontal
Beam height from base plate (mm)	110
Cooled method	Air cooled
Operating temperature (°C)	10-35
Power supply (100-240VAC)	12V/6.67A
Expected lifetime (hours)	>10000

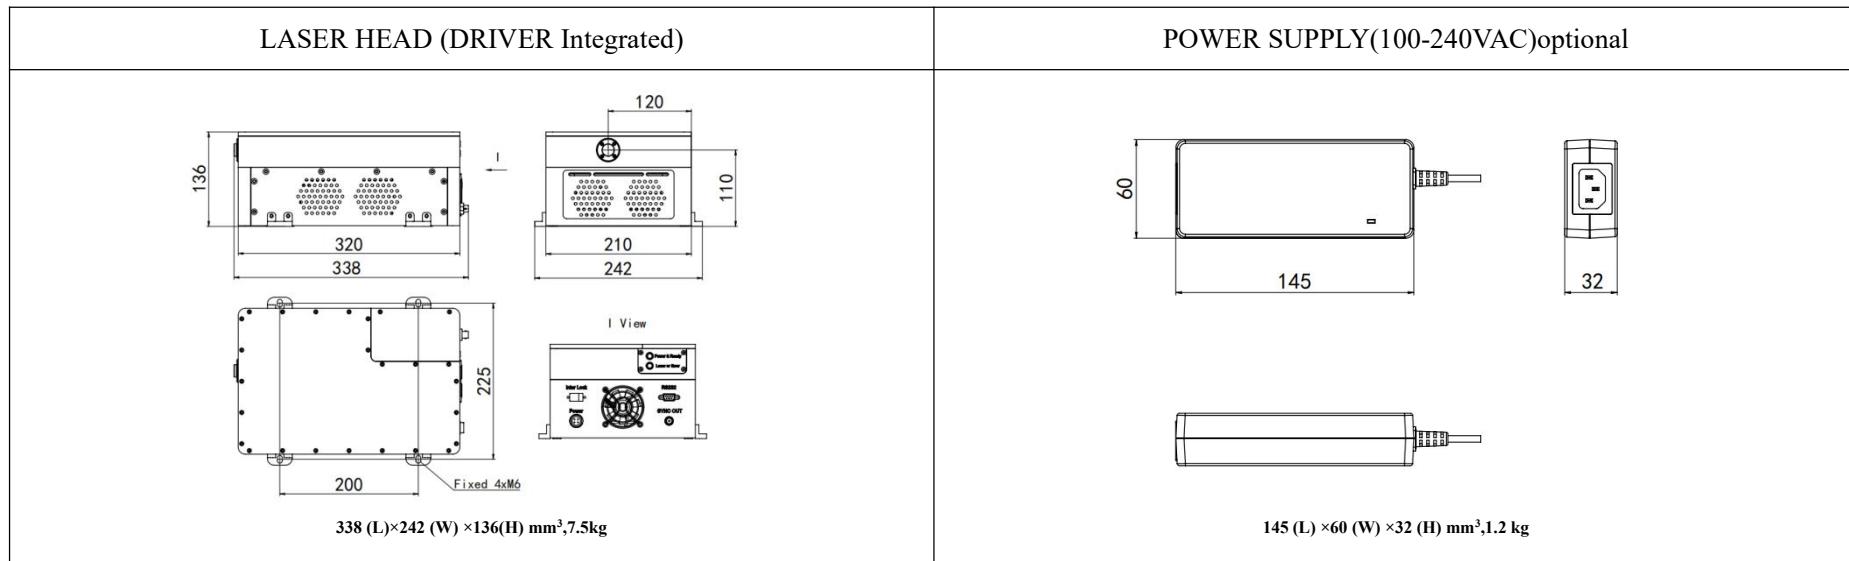

1 One fixed value between 1-100mW.