

MDL-XD-444/16-20W


BLUE DIODE LASER AT 444nm

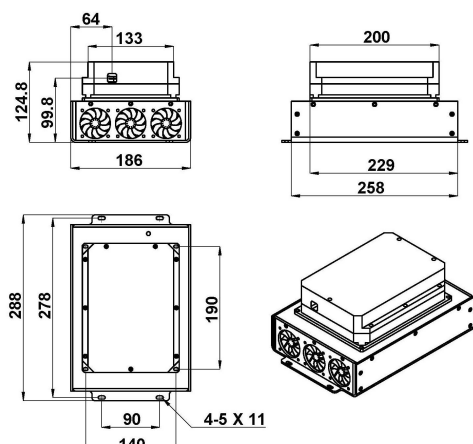
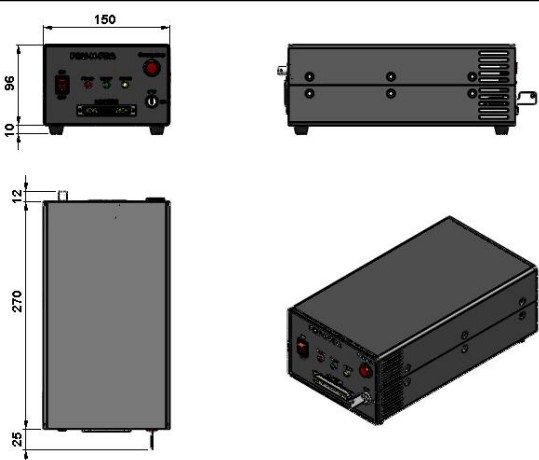
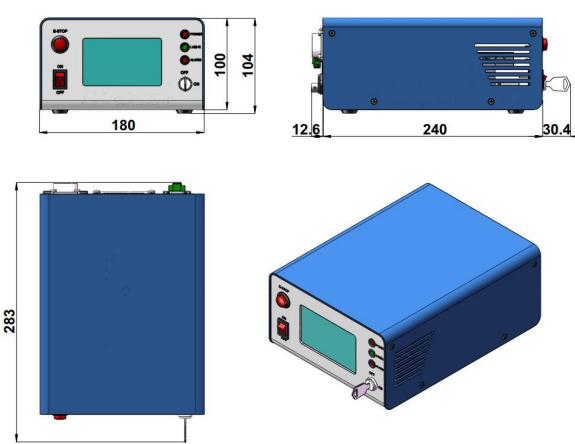
It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are widely used in measurement, communication, spectrum analysis.



SPECIFICATIONS

Central wavelength (nm)	444±5
Operating mode	CW
Output power (W) ¹	16-20
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Transverse mode	Multimode
Polarization direction	Horizontal+ Vertical
Beam diameter at the aperture (mm)	~7.5×5
Beam divergence, full angle (mrad)	<2×4
Warm-up time (minutes)	<5
Beam height from base plate (mm)	99.8
Operating temperature (°C)	10-35
Power supply (100-240VAC)	PSU-N-FDA/PSU-N-LED
Modulation option	DC-1kHz, 1kHz-10kHz, 10kHz-30kHz optional; TTL and Analog optional
Expected lifetime (hours)	>10000



LASER HEAD	POWER SUPPLY (PSU-N-FDA) ²	POWER SUPPLY (PSU-N-LED) ³
 288(L) × 186(W) × 124.8(H) mm³, 6.6 kg	 307 (L) × 150 (W) × 106 (H) mm³, 3.0kg	 283 (L) × 180 (W) × 104 (H) mm³, 2.5kg

1 Any power level can be selected in this range.

2 Fixed output power; Modulation up to 30kHz.

3 Output power adjustable 10-100%; RS232 control optional; Modulation up to 30kHz.